


INSTALLATION INSTRUCTIONS

Flat Dream Light Chromatherapy Water Feature Rain Canopy

Part #'s: 4040-DLCT, 40R-DLCT, 4020-DLCT

JACLO®


Confidence from start to finish.®




Read
carefully




Wear
protective gloves

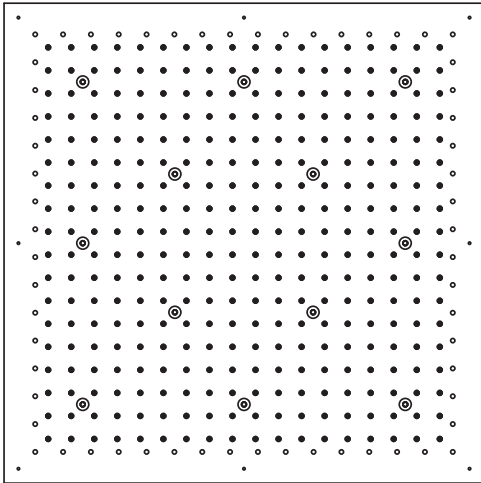

4040-DLCT

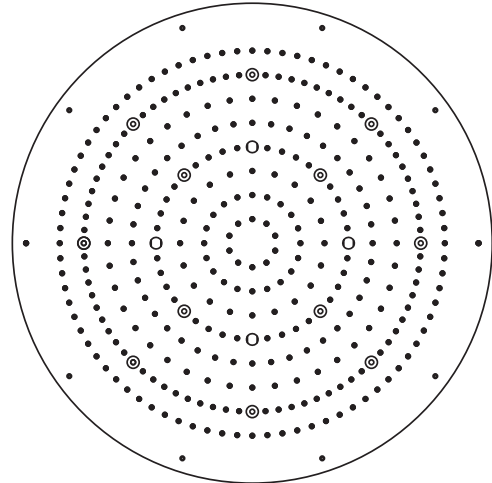





40R-DLCT

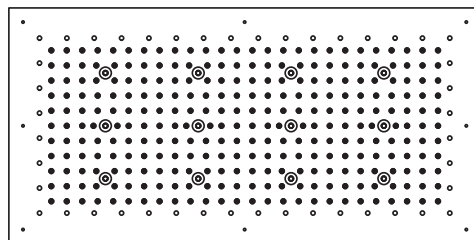

4020-DLCT

Parts

1. Stainless steel shower head
2. LED
3. IP66 / IP67 electronic board
4. Quick coupling connector to shower head
5. Recessed enclosure
6. Control keypad with 3m cable (other lengths available on request)
7. Connector with fuse
8. 7V connection cable - 5m long (other lengths available on request)
9. Power supply unit
10. Flexible hose 2 m 1/2"F X 1/2"F
11. False-ceiling plugs
12. Screws
13. Template
14. Adaptor connection 1/2"M x 1/2"M
15. Hex key with grub screws
16. Rubber nozzles (spare)
17. Chrome plate
18. Flexible hose 0,4 m 3/4"F x 3/4"F
19. Seal
20. Flow Regulator

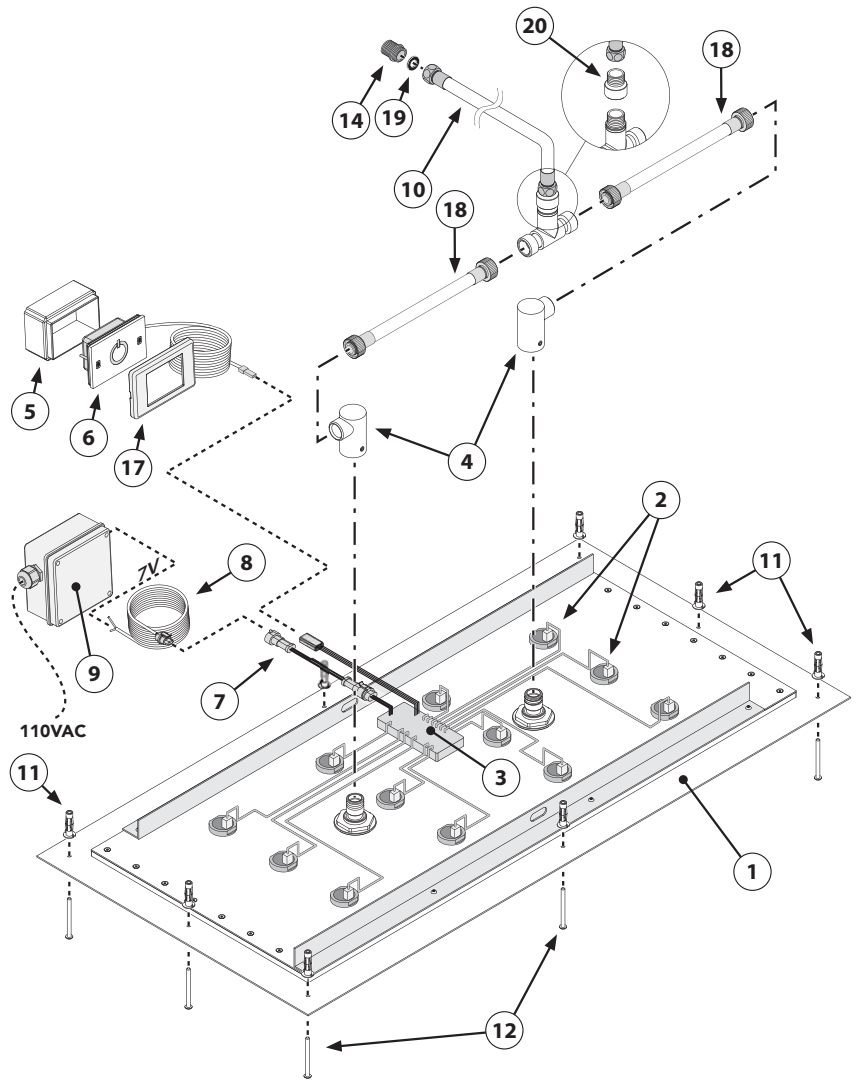

Technical Features


Product	LED	Flow Rates	Product Weight (Kg)
4040-DLCT 40" x 40"	12	min 20 L/min max 30 L/min	40,0
40R-DLCT 40" Diameter	12	min 20 L/min max 30 L/min	34,0
4040-DLCT 40" x 20"	8	min 20 L/min max 30 L/min	18,0



Electrical Equipment

Technical Specifications


Electric connection	110VAC ~ 50/60 Hz - max 20w, class of protection II
Electric cable (supplied by customer)	External cable diameter: max 8.5mm
4040-DLCT	12 low voltage LEDs
40R-DLCT	12 low voltage LEDs
4020-DLCT	12 low voltage LEDs
Safety Transformer	110V ≈ / 7V = 50/60 Hz to be installed outside the safety area (in compliance with standard DIN VDE 0100, part 107 - according to prescription CEI 64/8)
Grade of protection	
Safety mark	
If no commands are sent to the system, a time-out function automatically shuts the system off after approx. 30 minutes.	



Recommended Set Ups

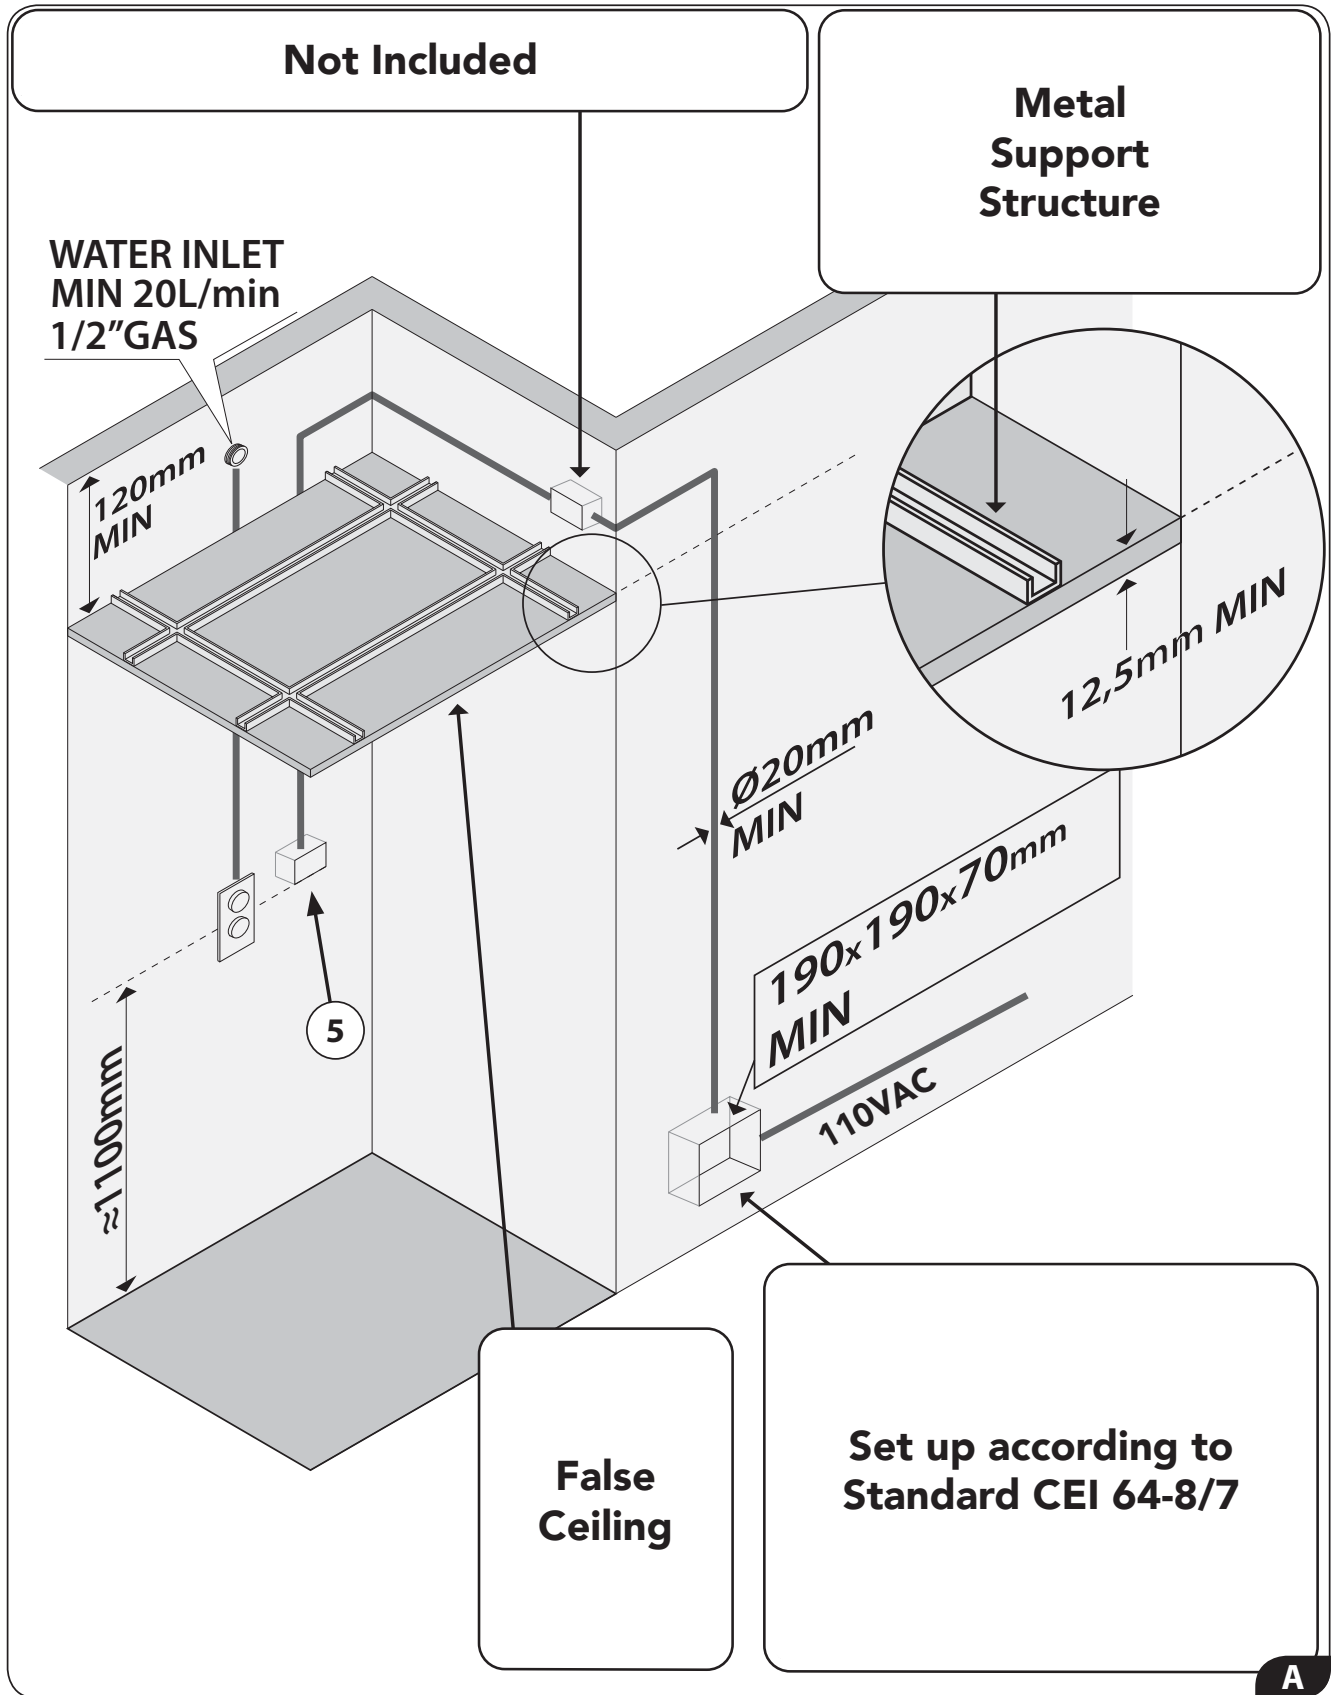


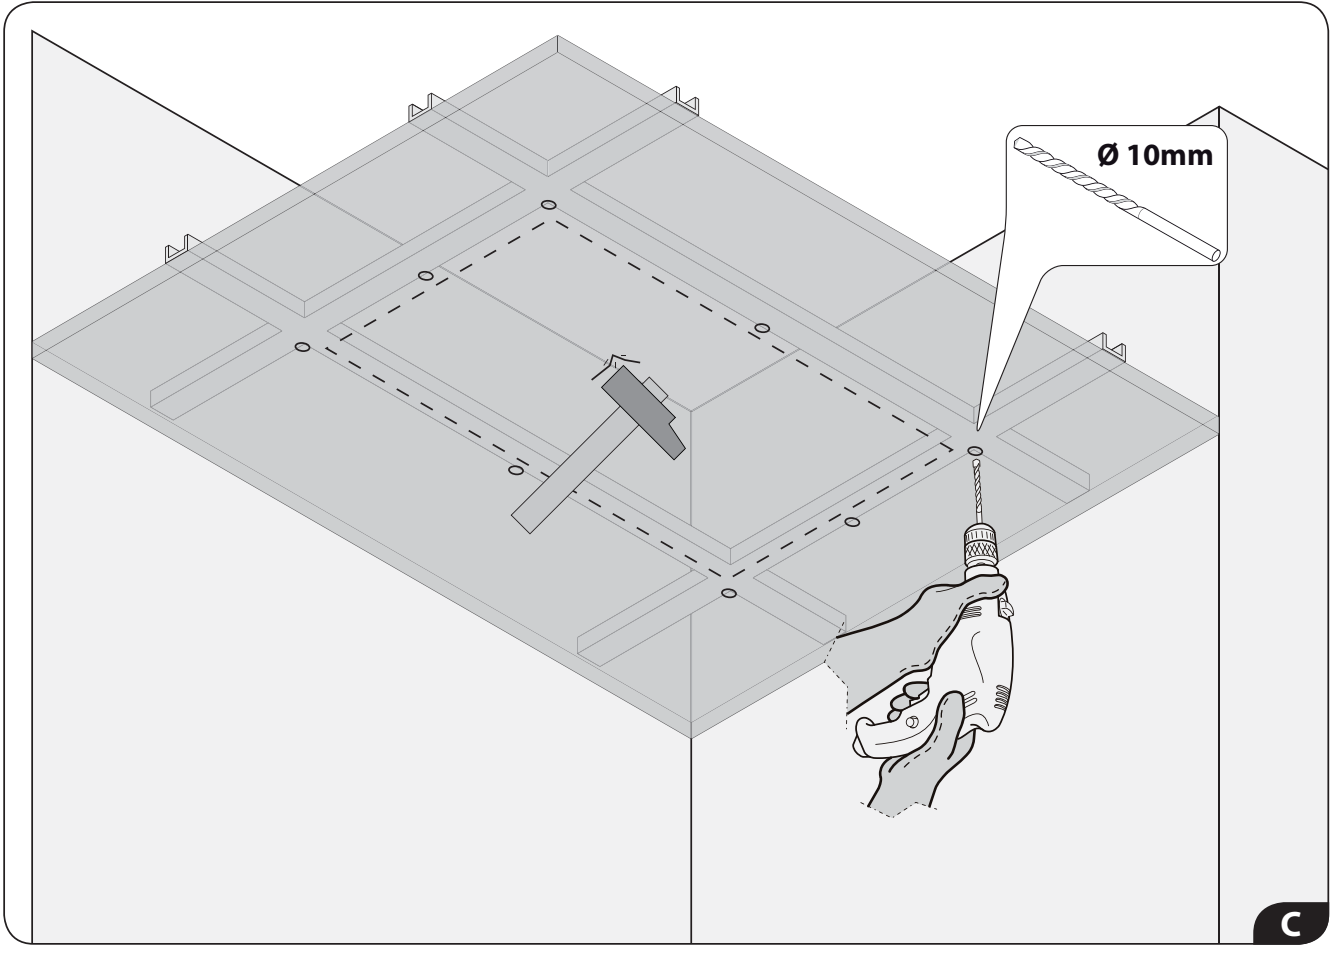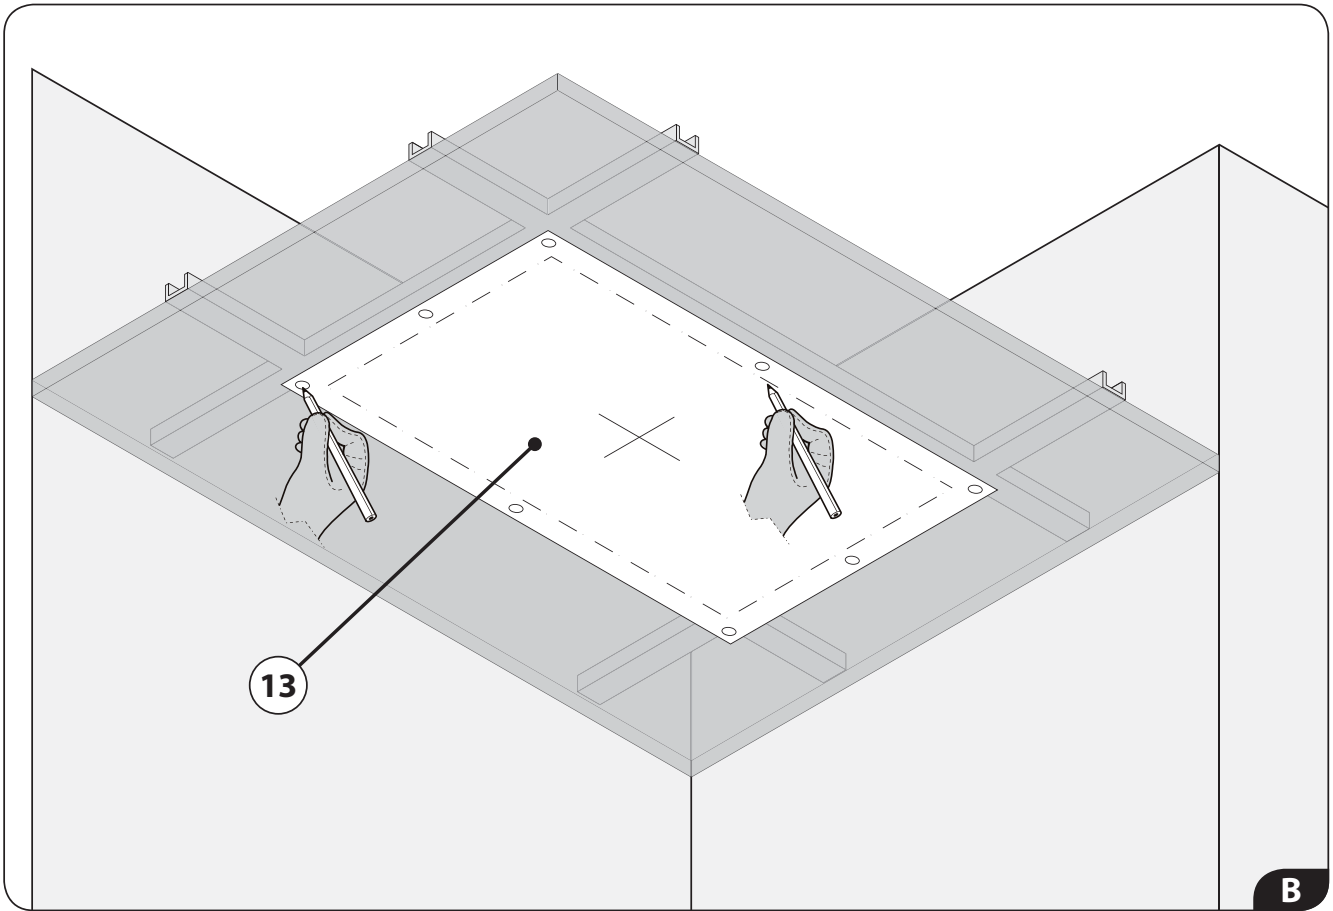



Installation

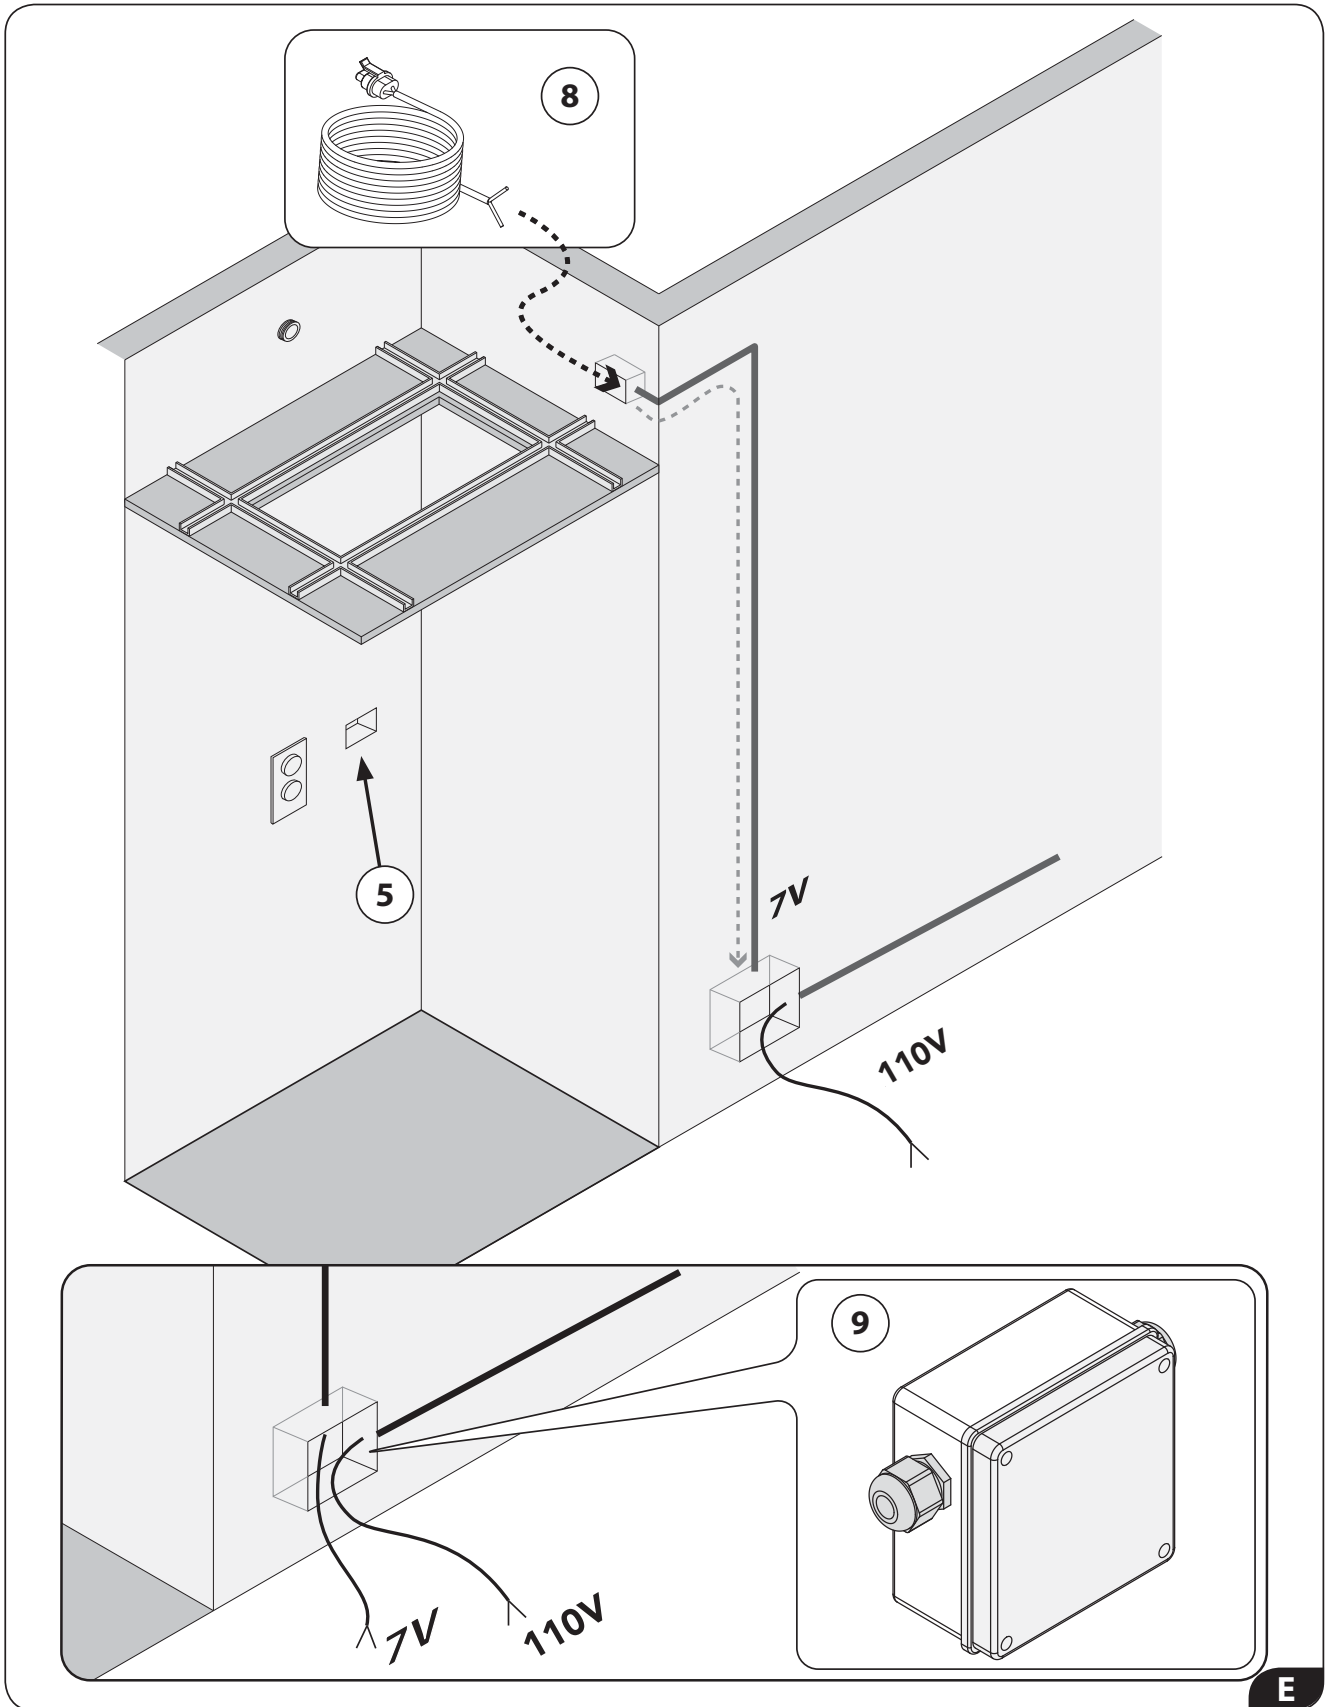

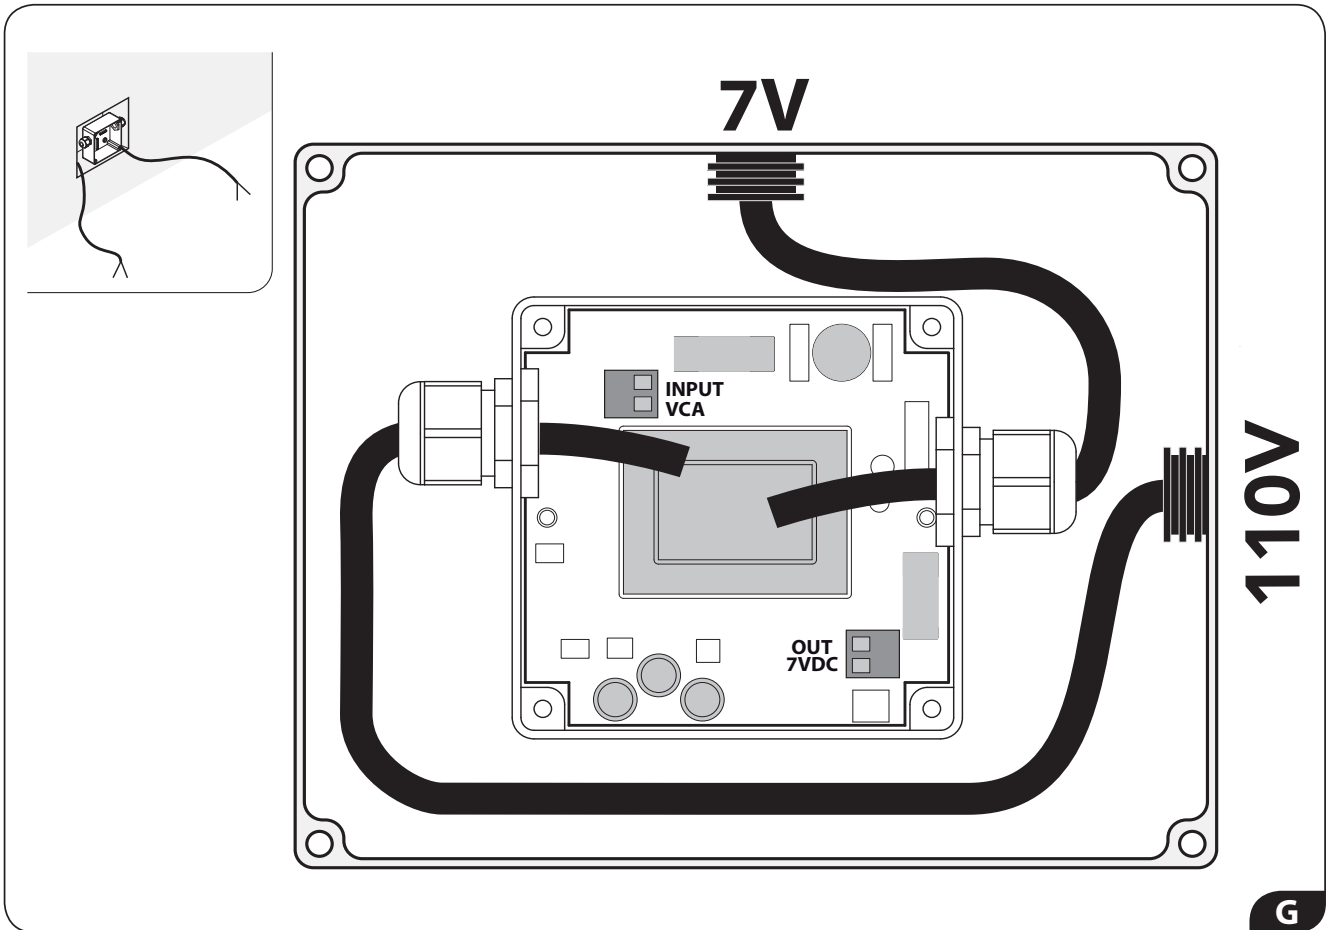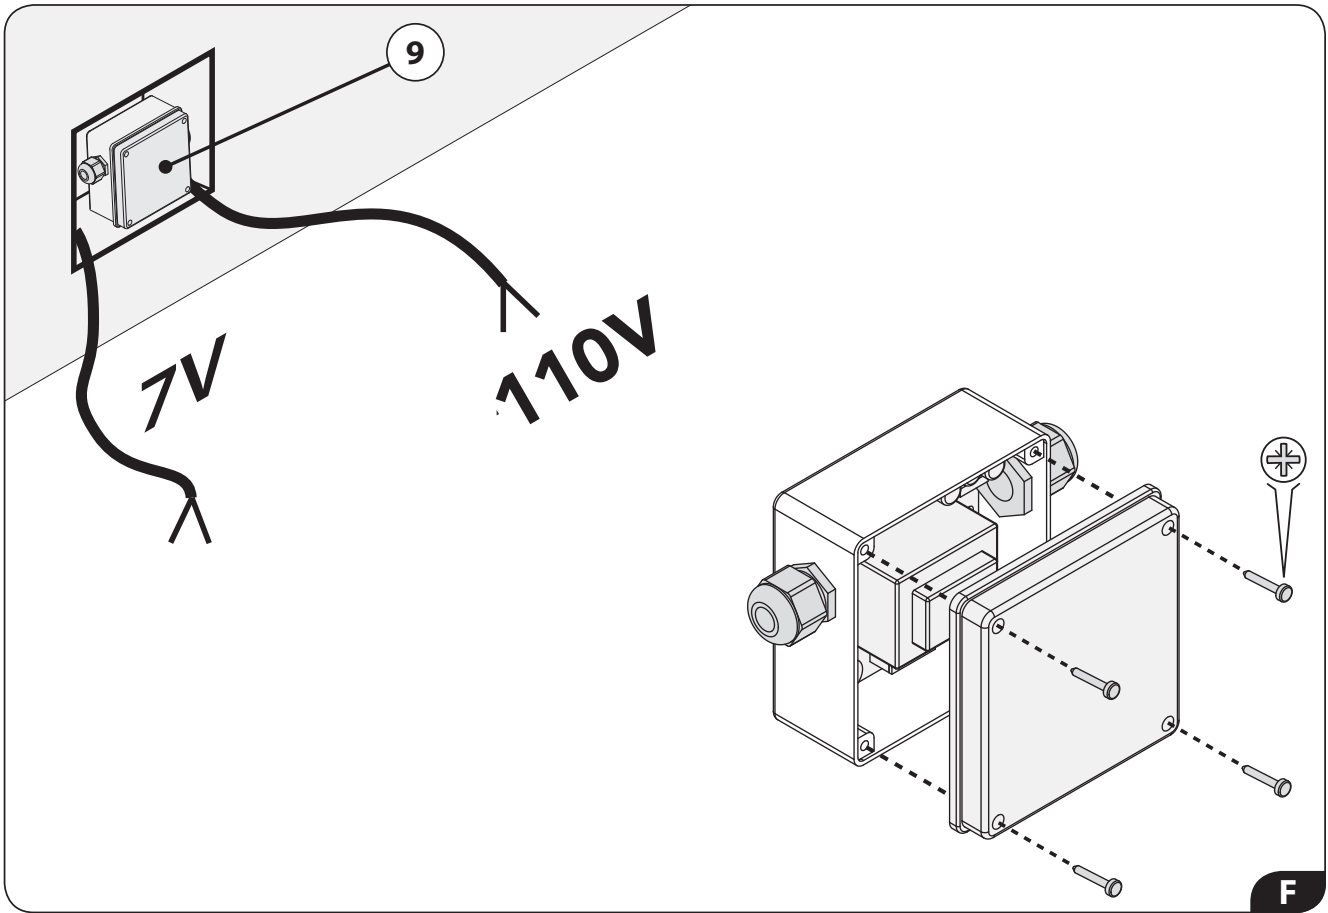


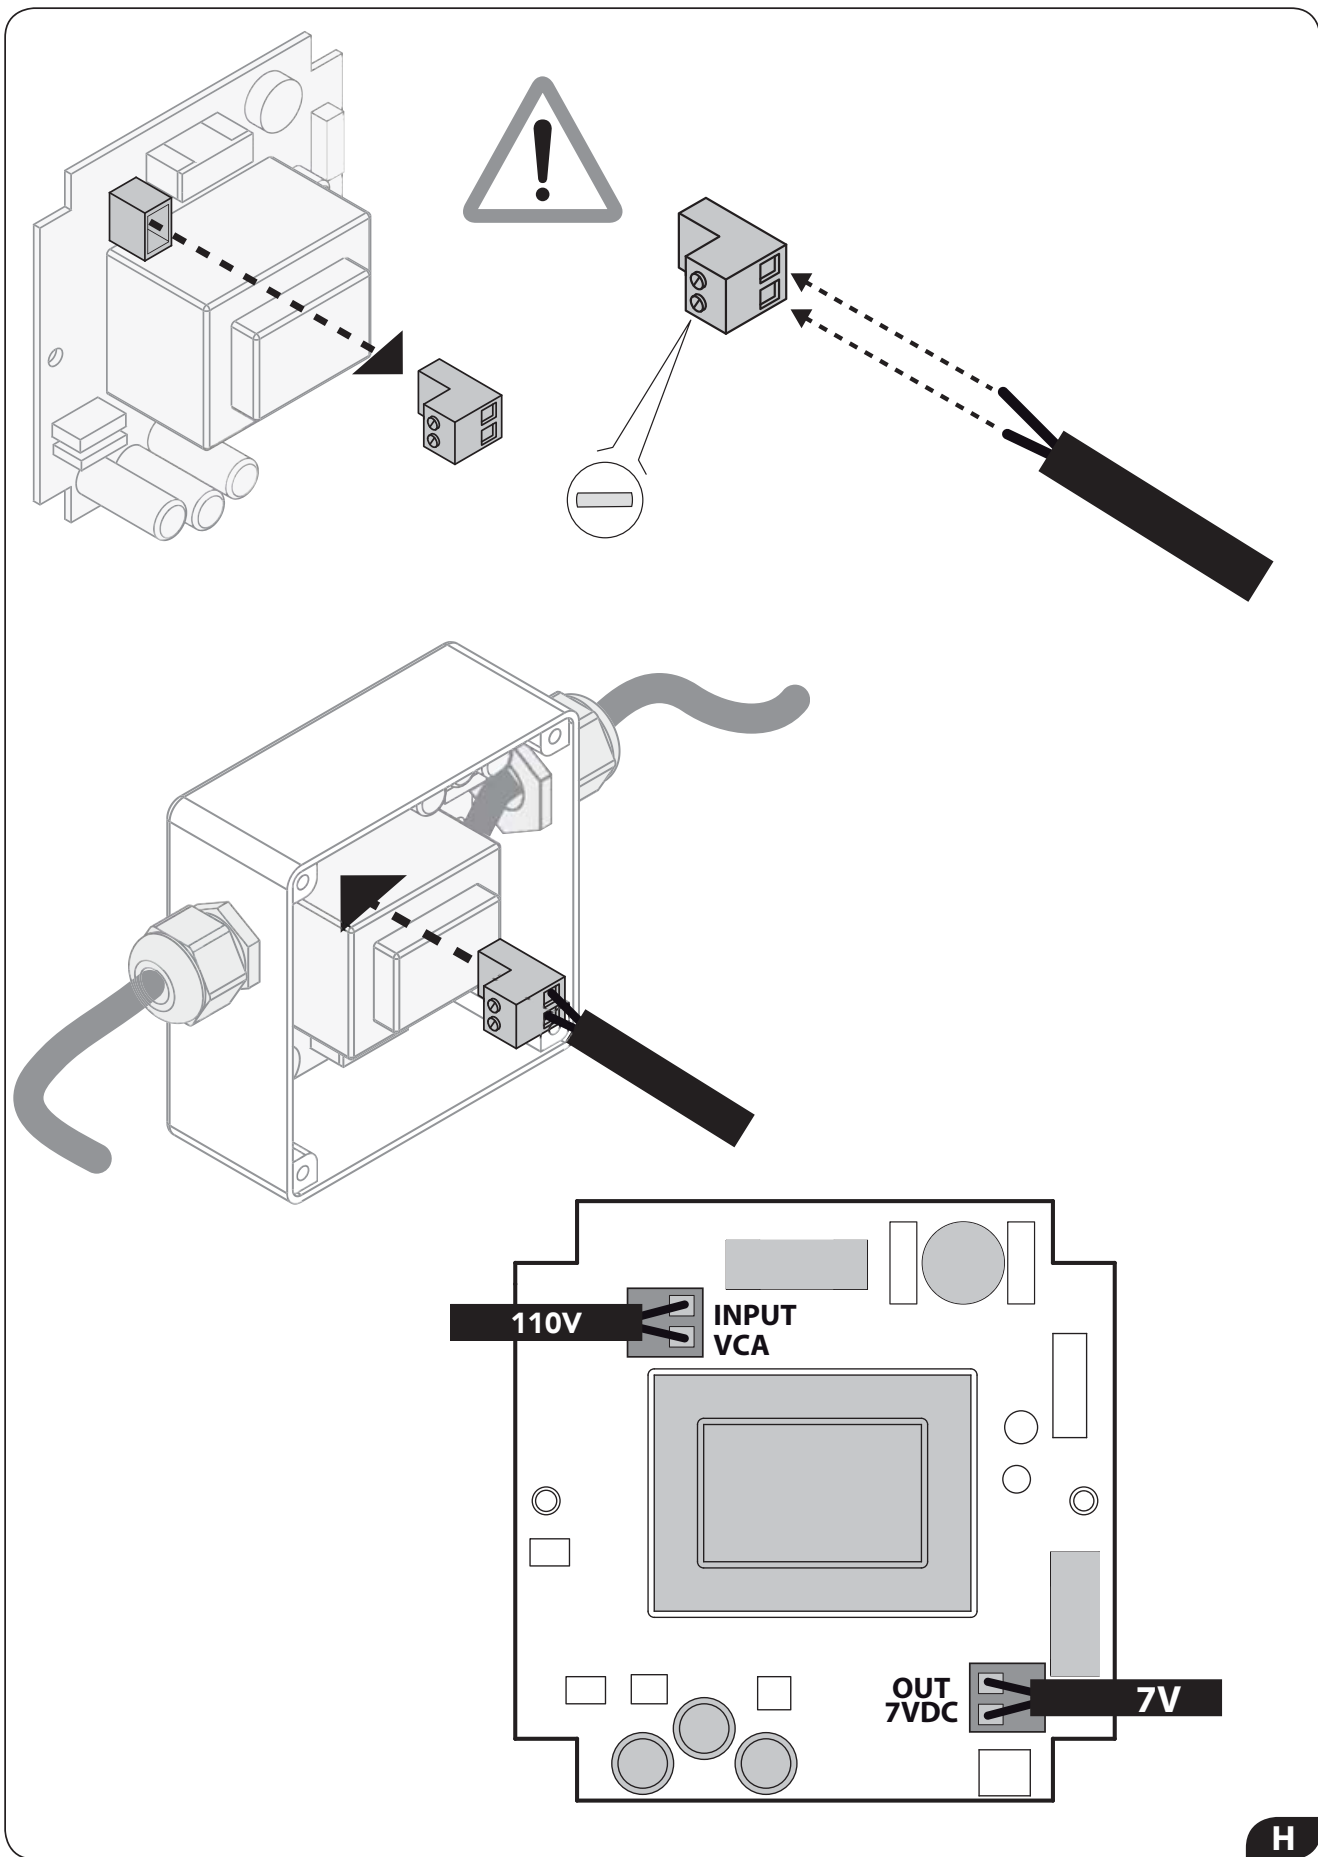

H

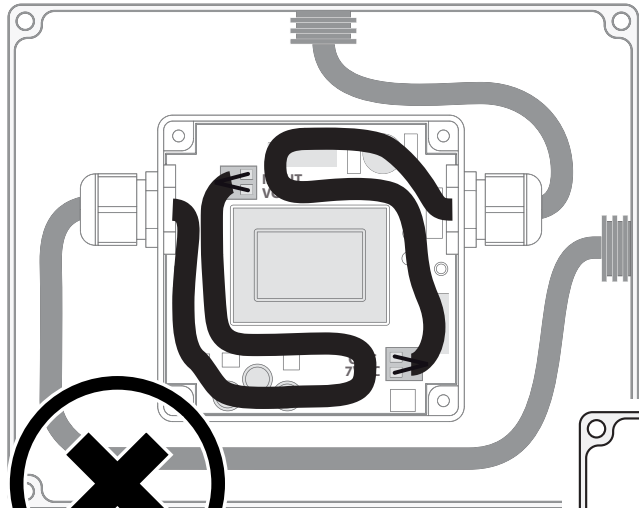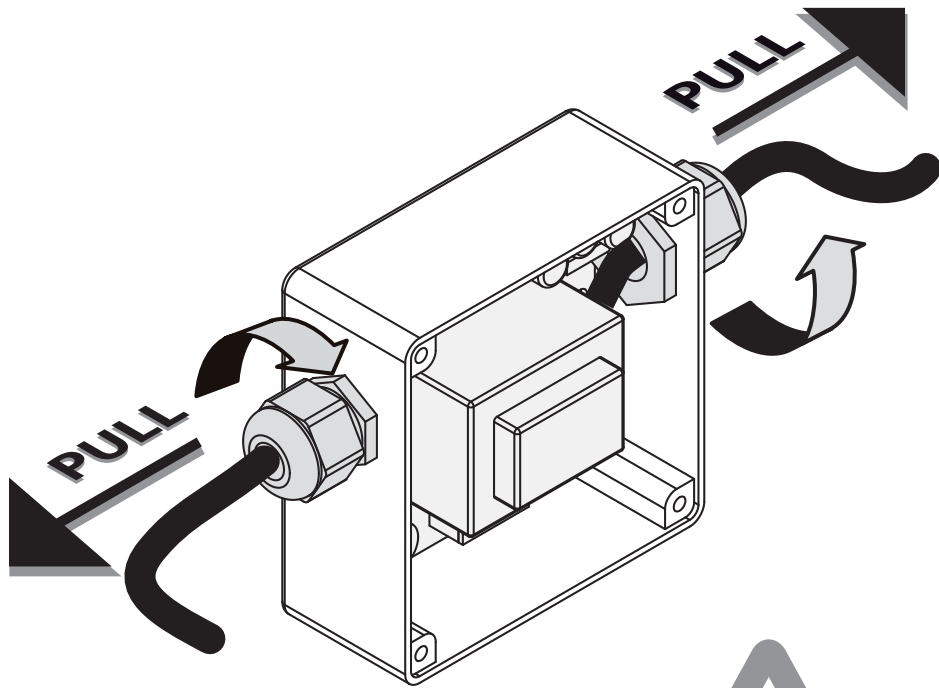


NO!

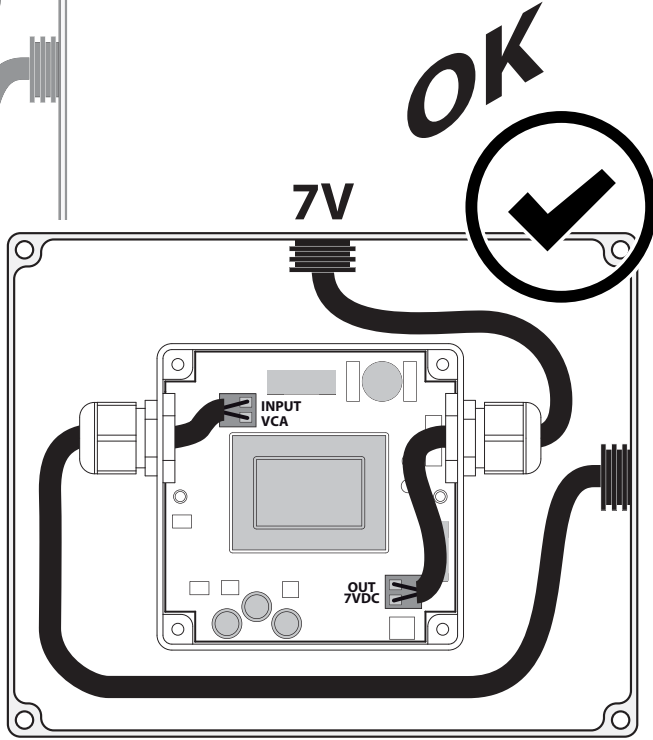


OK

7V


110V



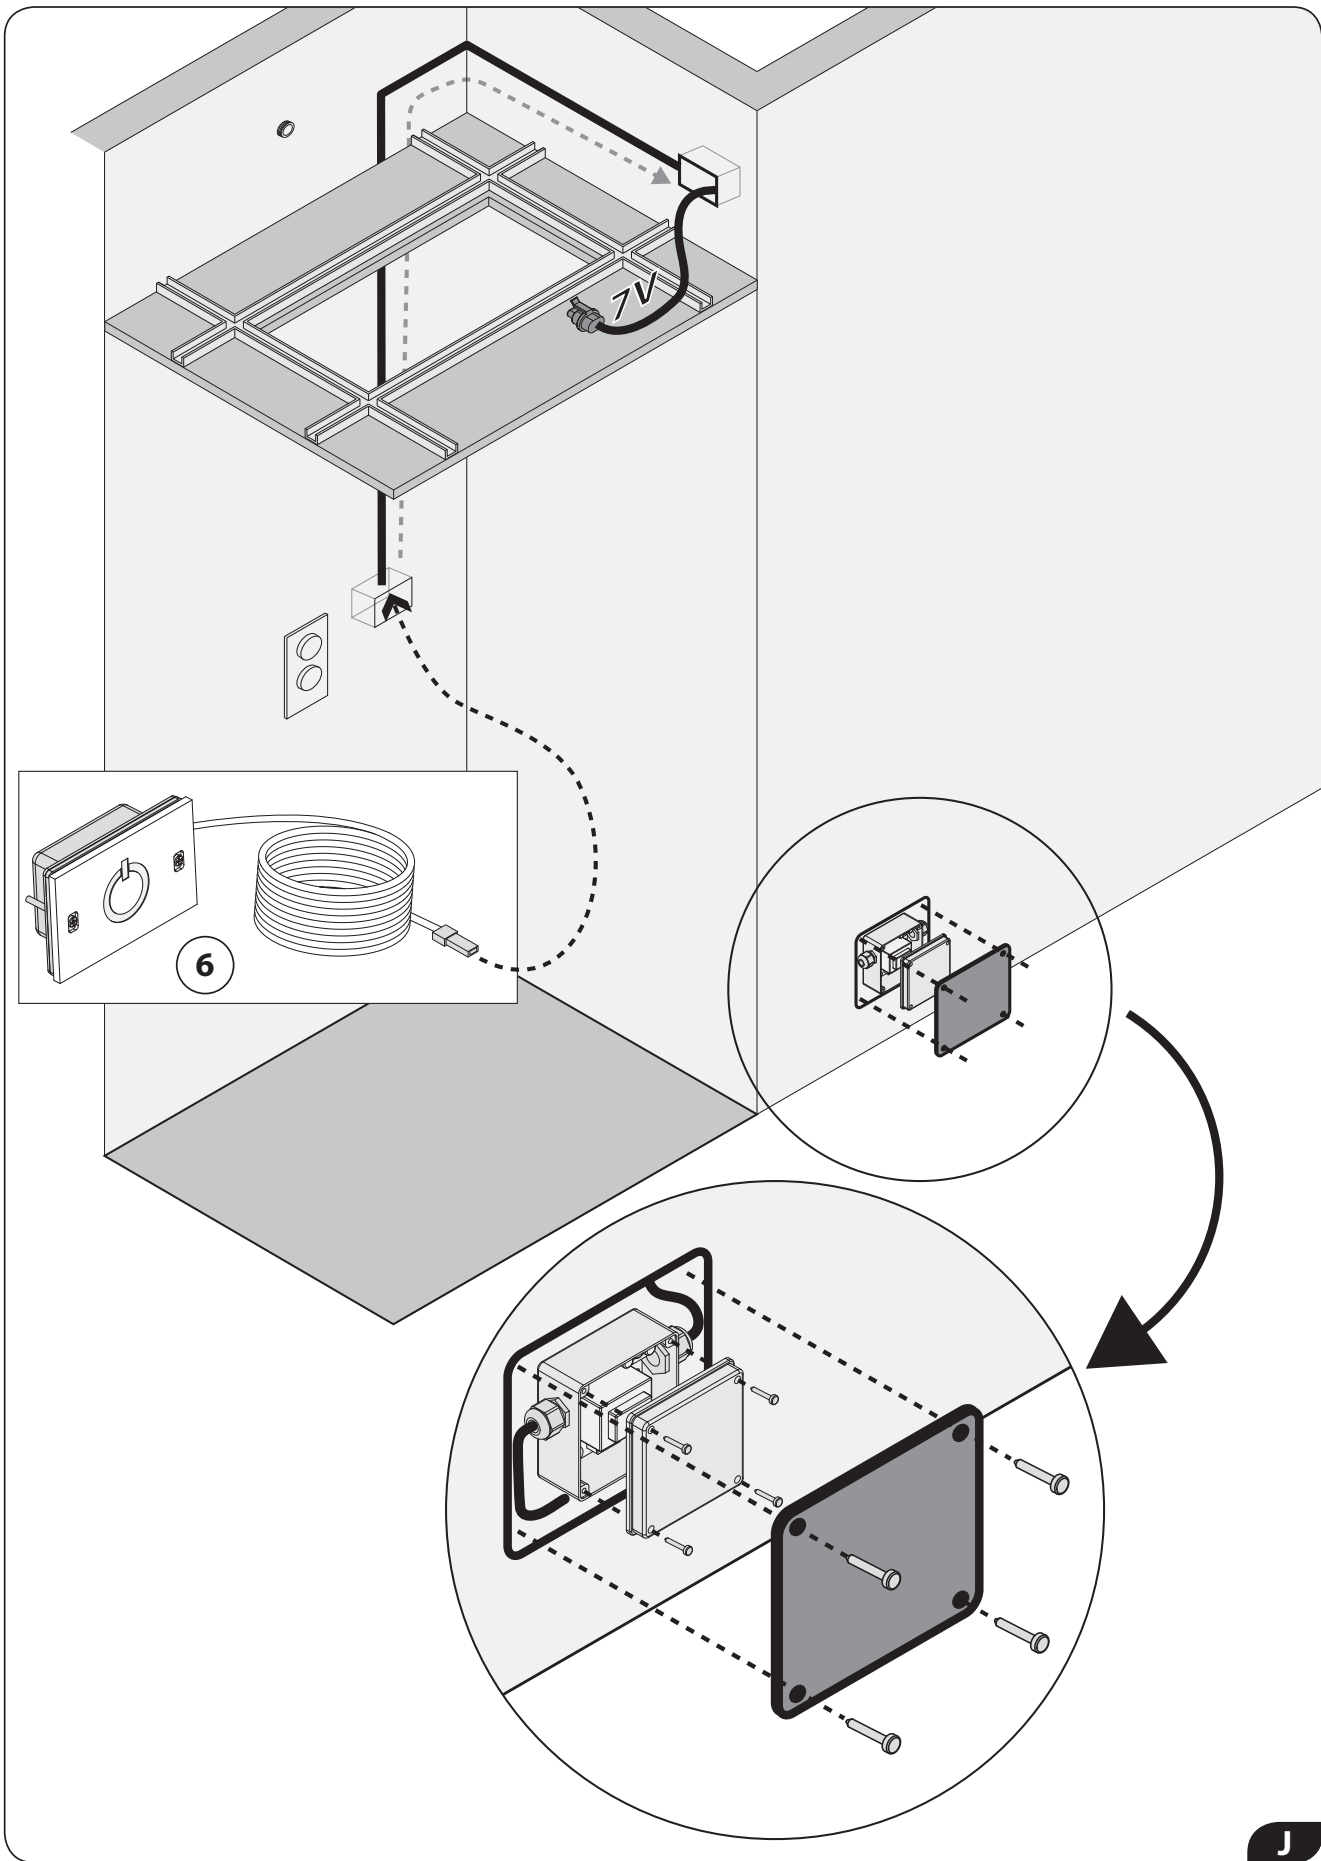





J

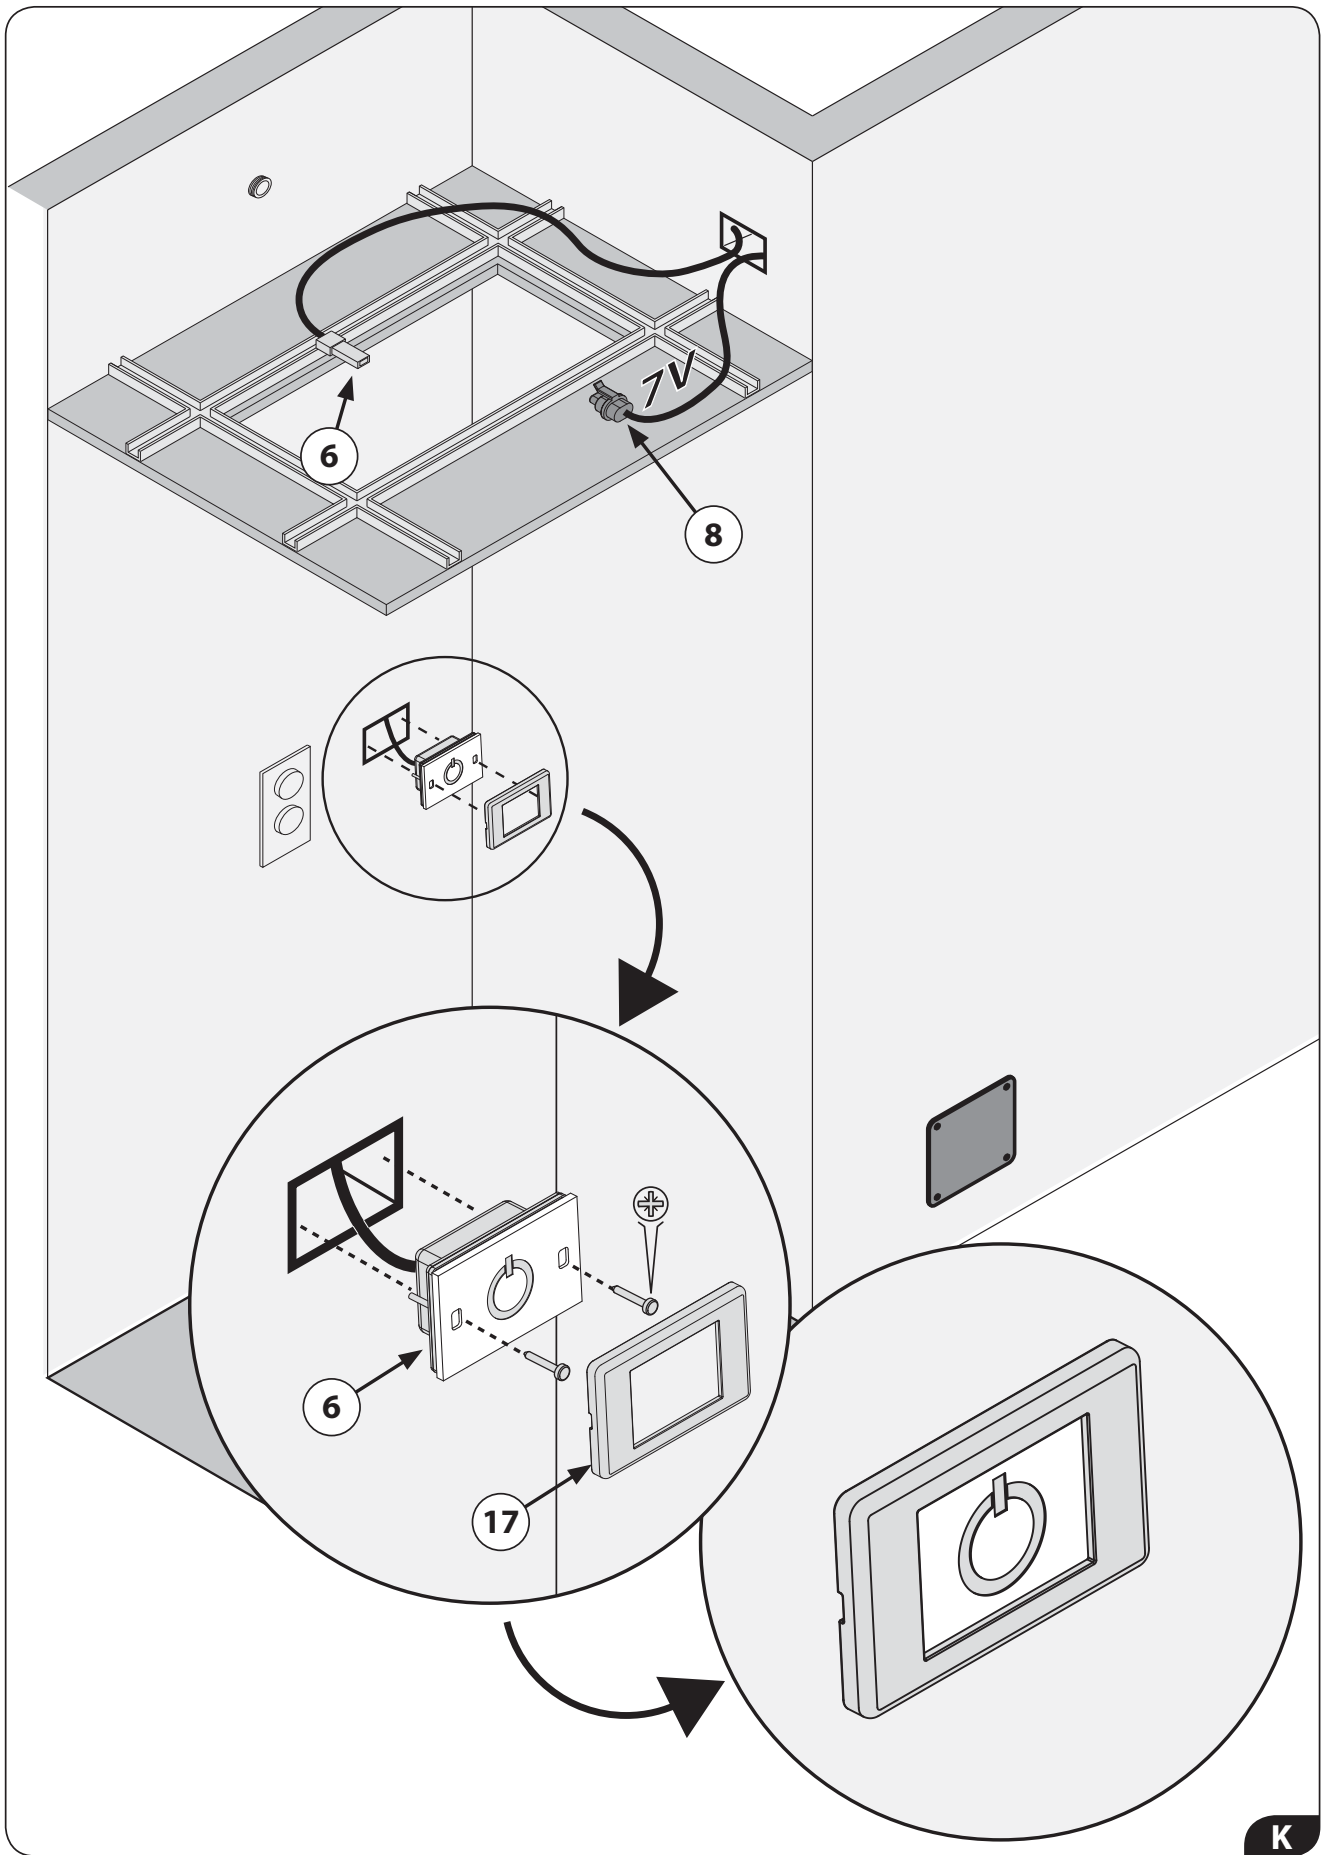



K

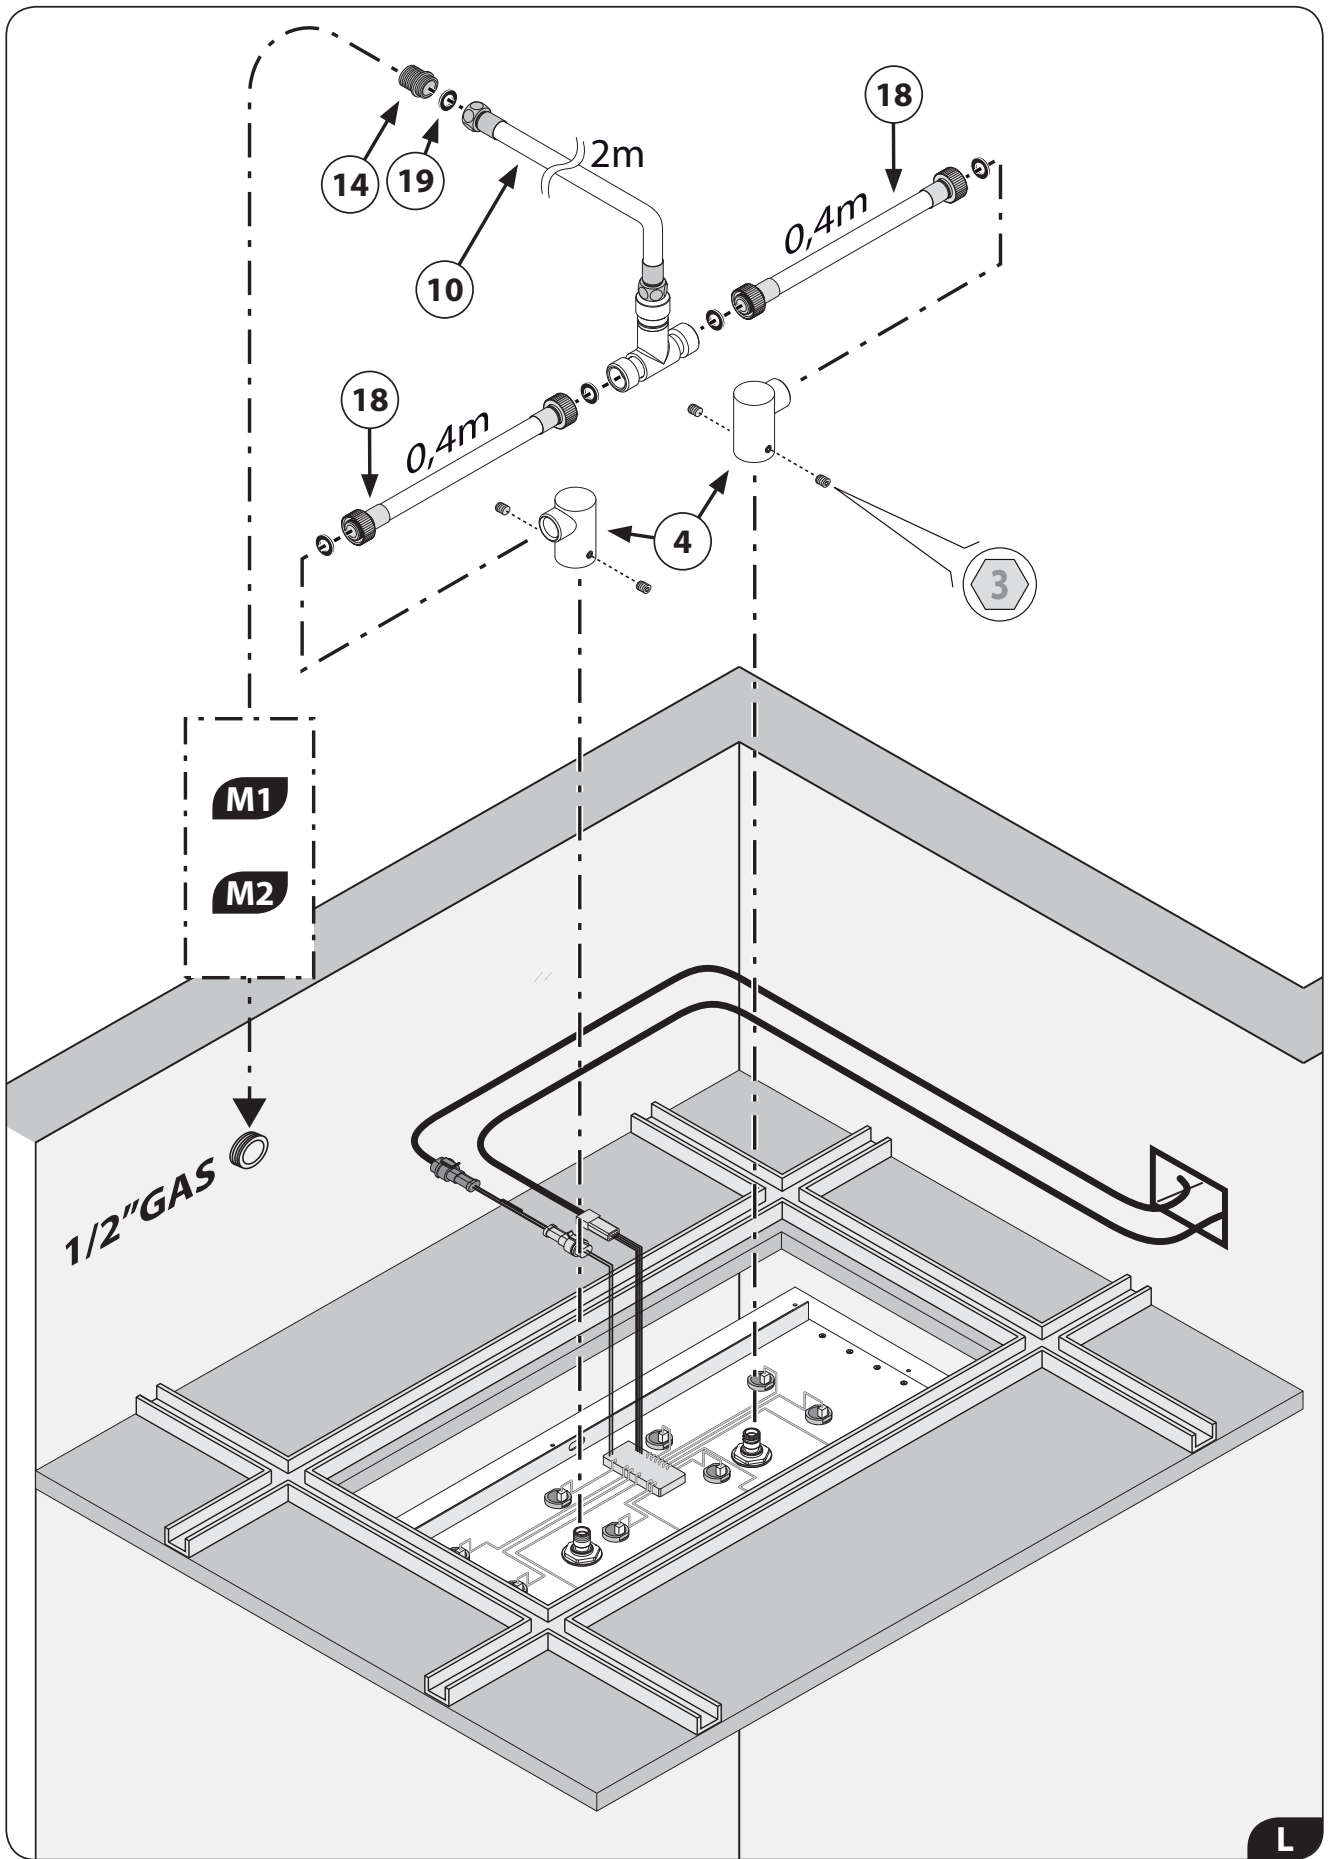



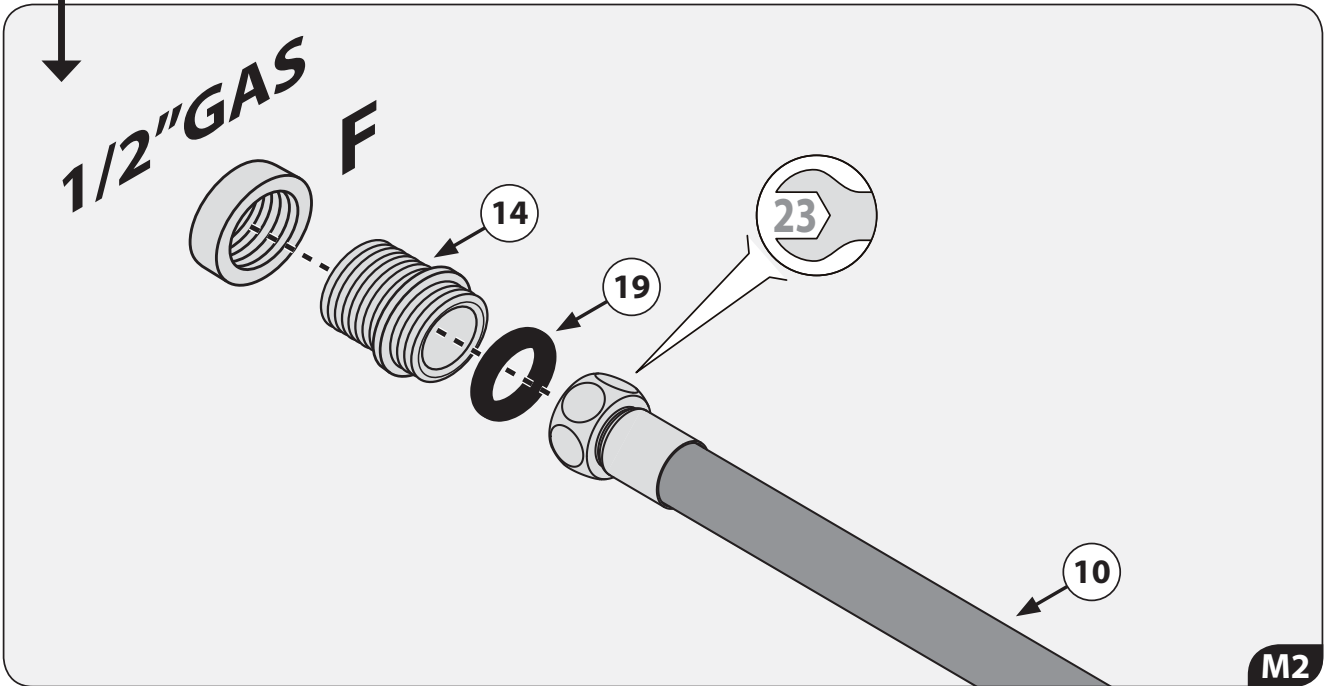
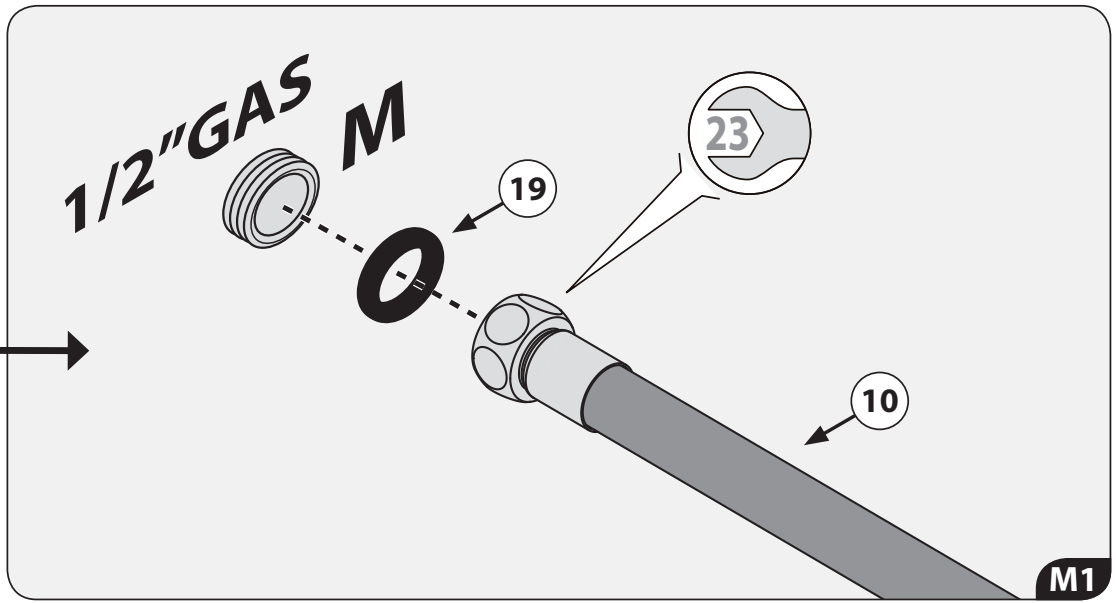
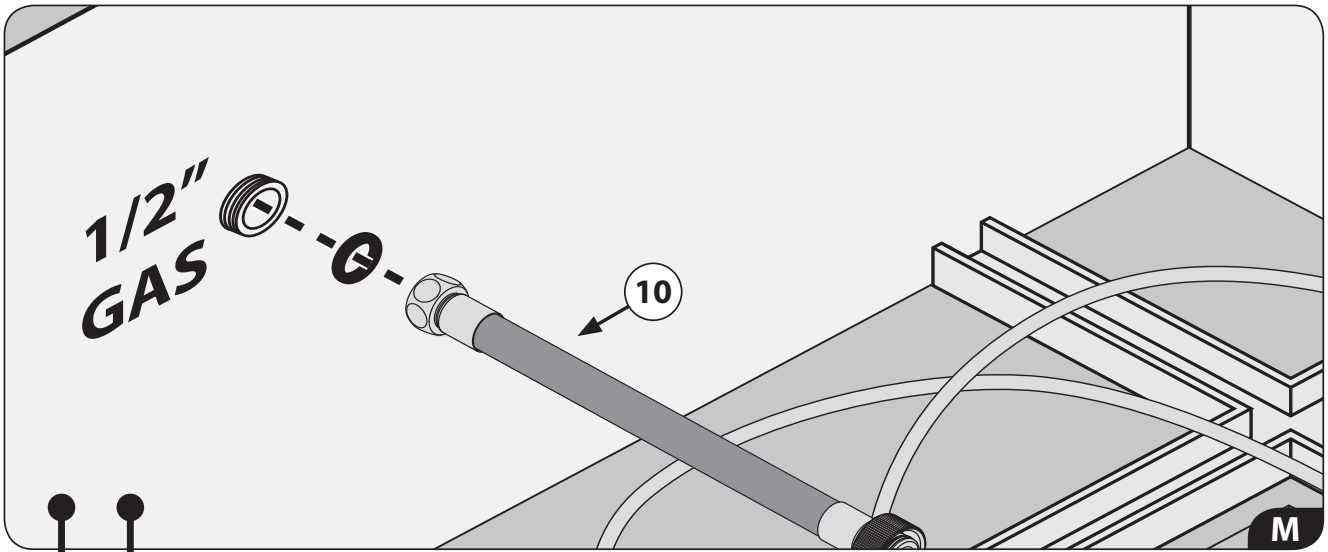


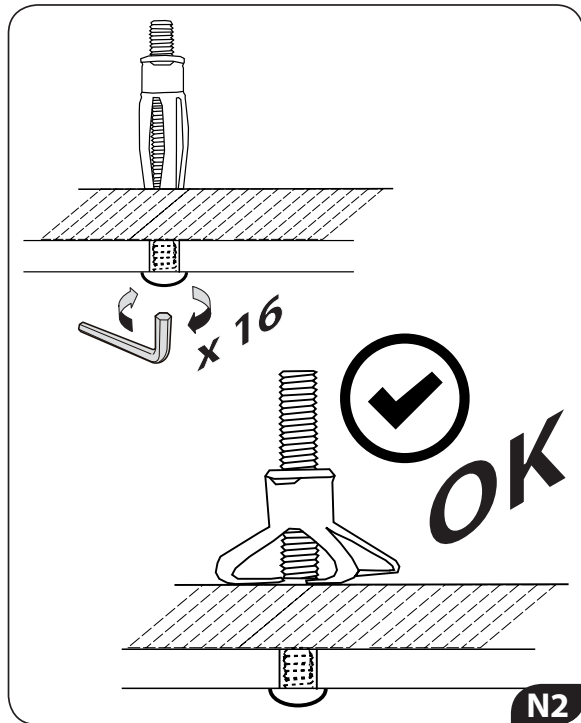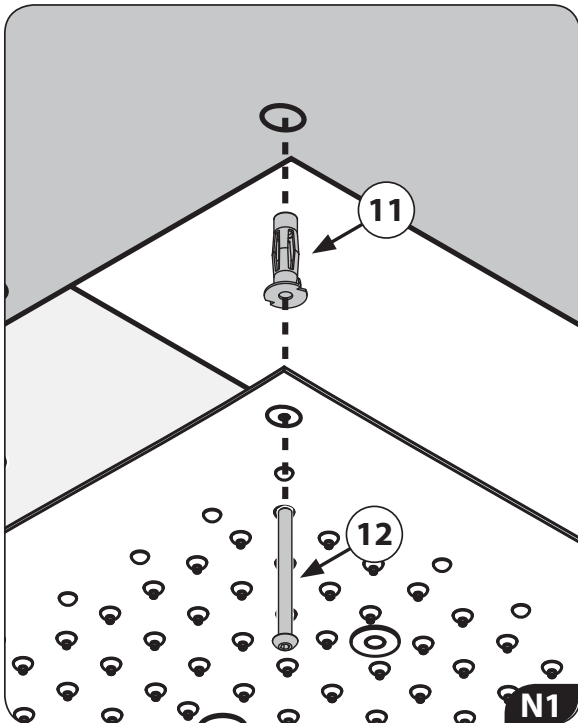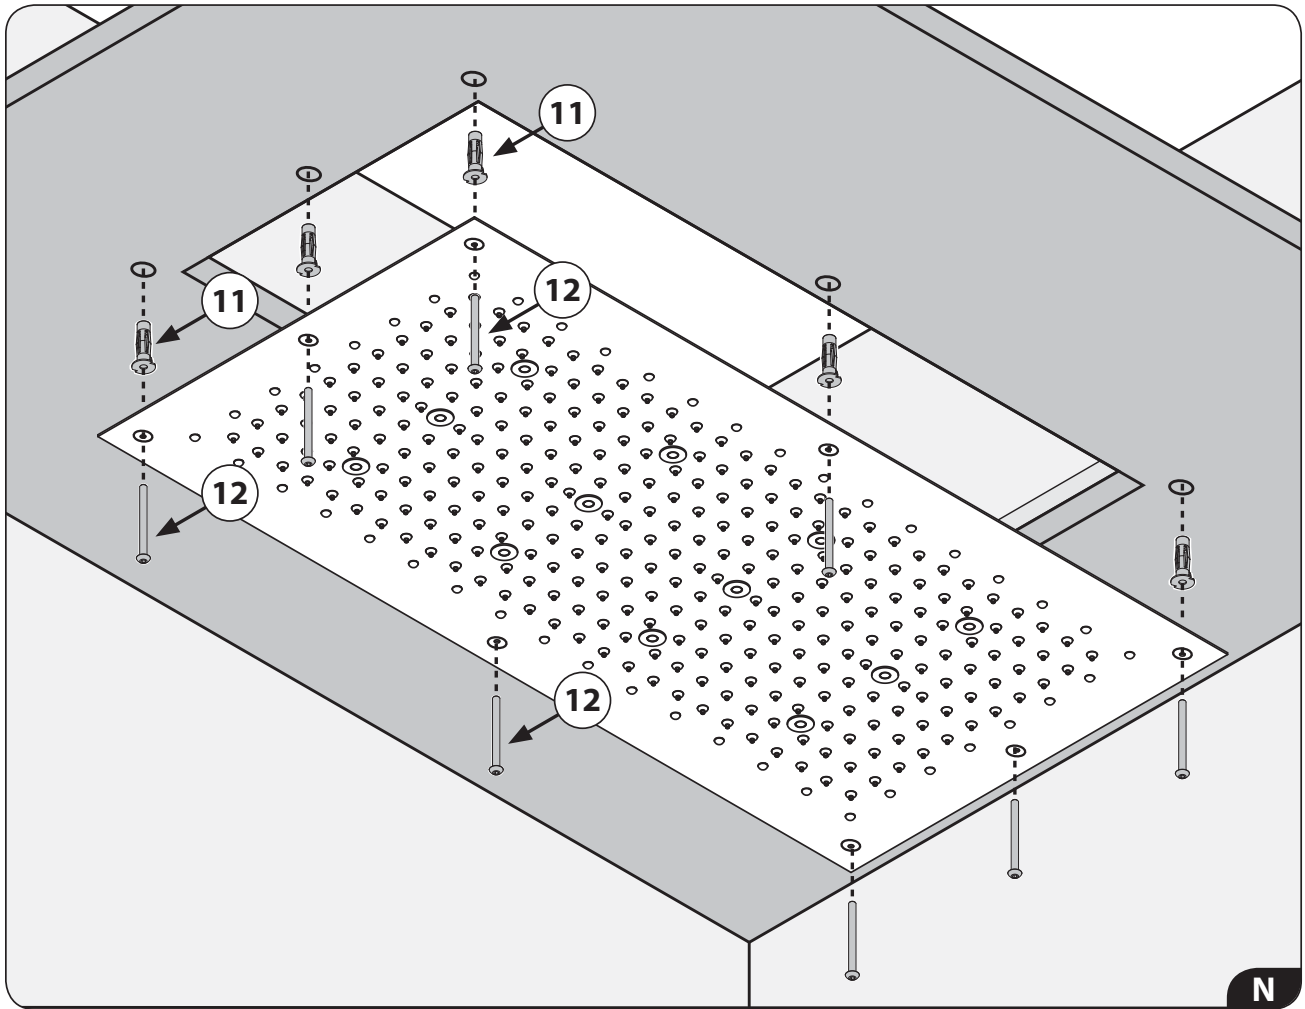

Control Keypad Operations

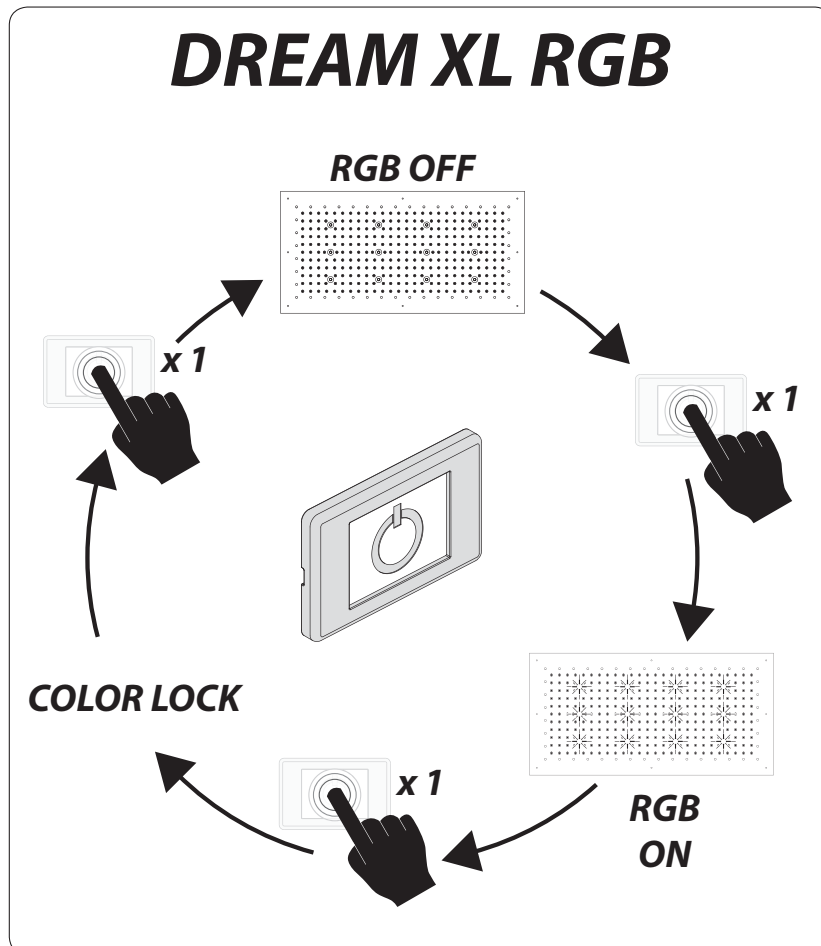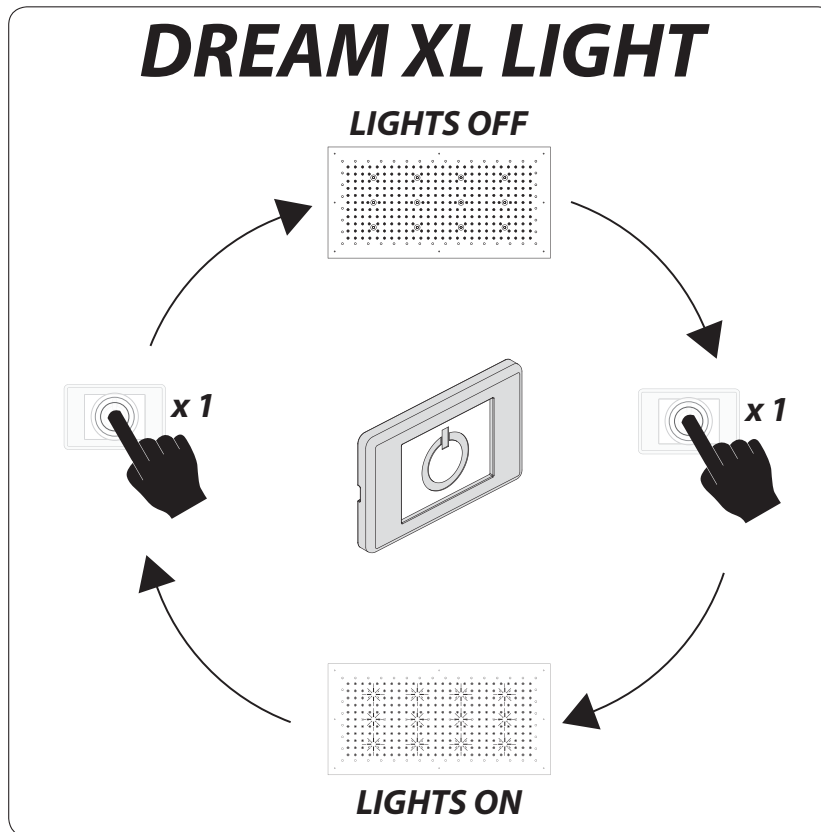

If no commands are sent to the system, a time-out function automatically shuts the system off after approximately 30 minutes

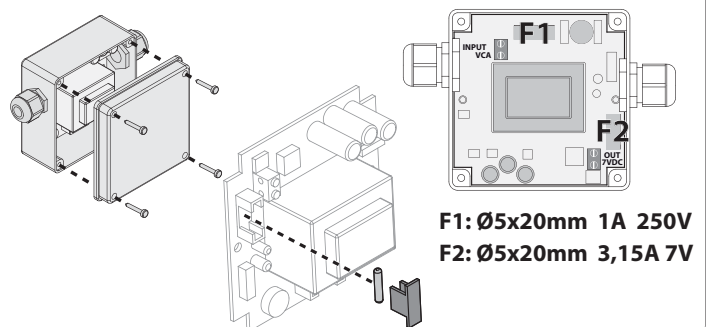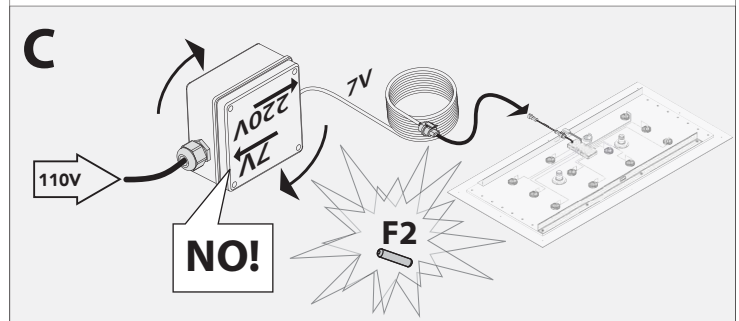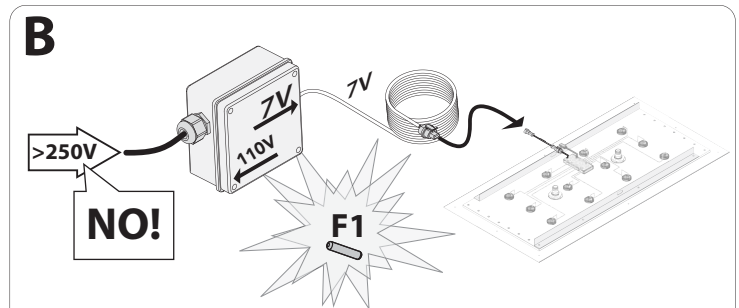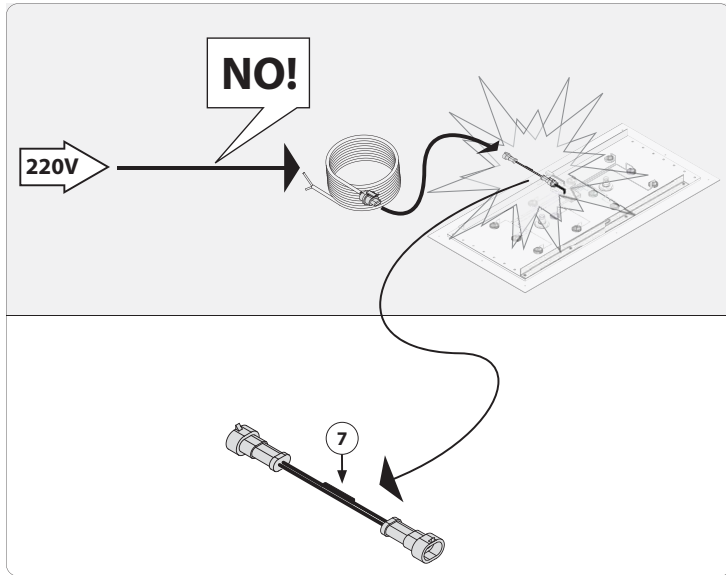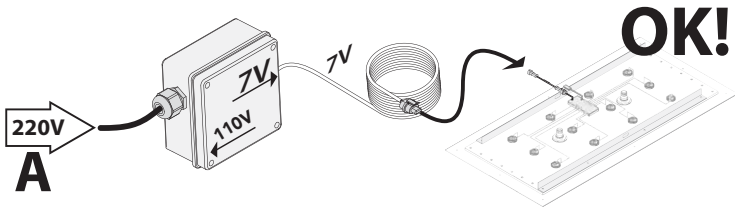

To learn more about JACLO's warranty, please visit [**jaclo.com**](http://jaclo.com)