

INSTALLATION INSTRUCTIONS

Bidet Spray Kits with On-Off Water Supply



Part #B039-646, B042-646, B043-646, B071-646, B074-646

IMPORTANT: SEE PAGE #2 FOR THE CORRECT USE OF THESE BIDET SPRAYS

JACLO
Confidence from start to finish.™


Materials provided:

Bidet Spray Kit
1 Pkg. Installation hardware

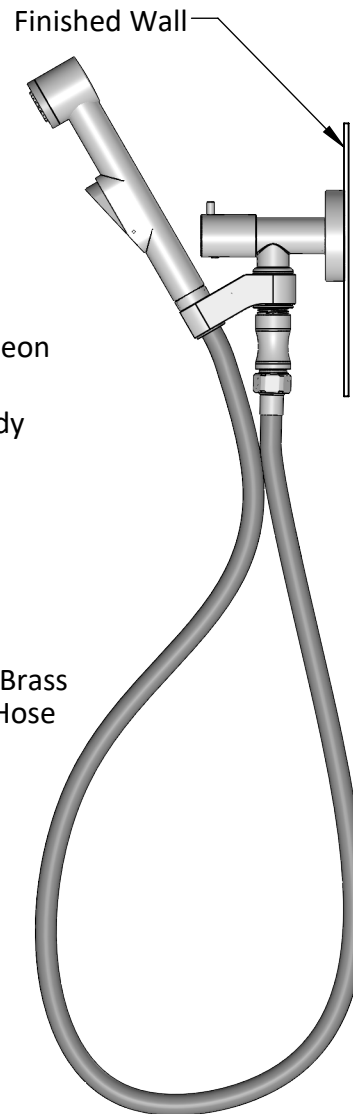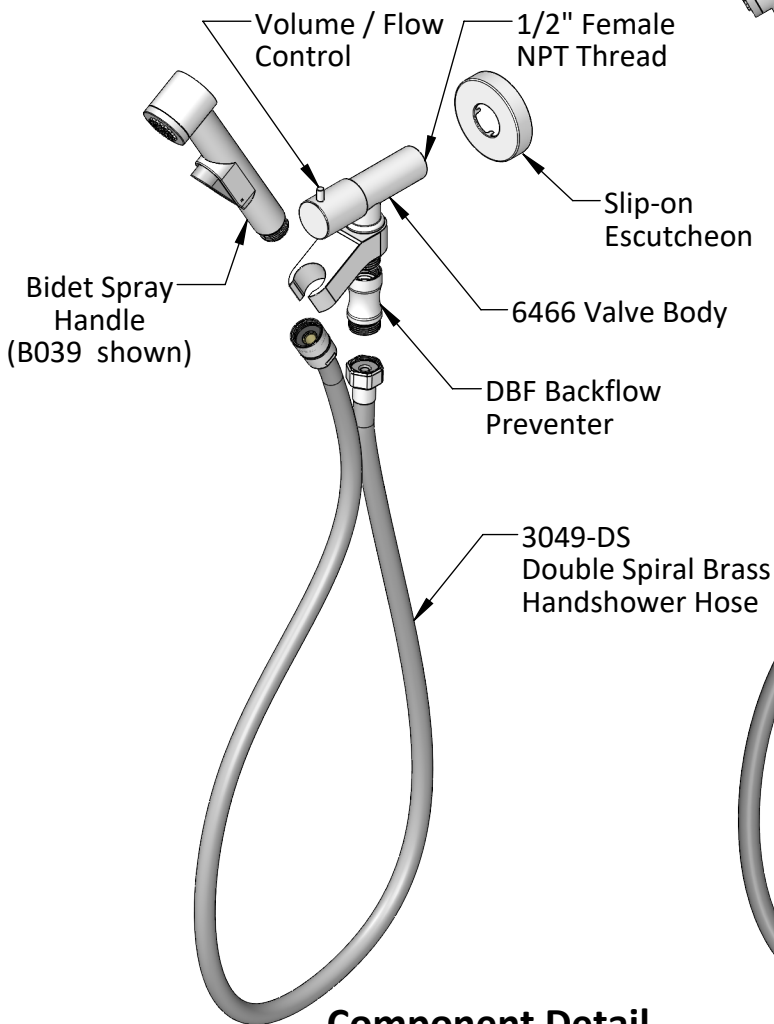

Recommended tools:
Thread sealant
Strapwrench

5/16" - 1/2"
Protrusion
Required

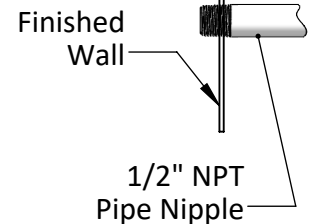

Note: These kits are equipped with a built-in positive shut-off valve. Any of JACLO's pressure balance valves or JACLO's 1/2" thermostatic valves with built-in volume controls can be used as the primary positive shut-off and mixing valve for temperature control.

Step 1: Install a 1/2" NPT pipe nipple as shown in the diagram above.

Step 2: Run water through system to flush out dirt and debris.

Step 3: Use appropriate sealant when threading fixture onto pipe nipple

Step 4: Connect the hose to the body and to the handshower; hang up handshower.

Step 5: Pressurize the unit and check to ensure no leaks are present while under pressure and while the handshower is in use.

INSTALLATION INSTRUCTIONS

Bidet Spray Kits with On-Off Water Supply

Part #B039-646, B042-646, B043-646, B071-646, B074-646

JACLO[®]
Confidence from start to finish.™



B039



B042



B043



B071



B074

THE FOLLOWING SPRAYER OPERATION INSTRUCTIONS APPLY TO ALL MODEL VARIATIONS SHOWN ABOVE:

NOTE: CORRECT USE OF THESE BIDET SPRAYS WILL PREVENT POSSIBLE DAMAGE TO YOUR BATHROOM.

After opening the **Volume/Flow Control Valve**, activate your bidet spray by pressing the **Bidet Spray Handle lever**.

It is important to always turn off the **Volume/Flow Control Valve** after each use. The bidet **Spray Handle** is not a permanent water stop, whereas it is designed as a temporary water shut off only!

If the **Volume/Flow Control Valve** is left open, the flexible hose may burst due to the permanent water pressure which may cause damage in your bathroom.

It is important to remember the functional characteristics of the hose may vary depending on different conditions of use, such as water pressure and temperature variations. Therefore, we strongly suggest to use the product correctly by always turning off the **Volume/Flow Control Valve** after each use.

After turning off your **Volume/Flow Control Valve**, always depress the **Bidet Spray Handle lever** one last time to release any line pressure in the **Handshower Spray Hose**.

To learn more about JACLO's warranty, please visit [**jaclo.com**](http://jaclo.com)